



Open End Steel Zinc Reduced head

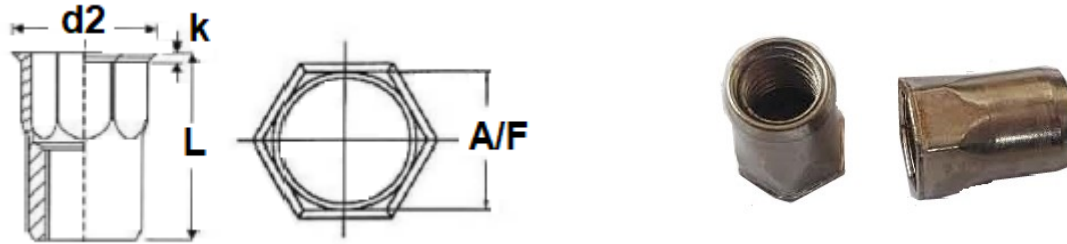

Past Code	Thread size	Grip Range	Hex hole	Hex Size d2 +0.3	L	A/F
INSERTEX M4	M4 x 0.7	0.5-2.5	6.4	7	11	6.3
INSERTEX M5	M5 x 0.8	0.5-3	7.3	8	12	7.1
INSERTEX M6	M6 x 1.0	0.5-3	9.7	10	14	9.5
INSERTEX M8	M8 x 1.25	0.5-3.0	10.7	12	16	10.5
INSERTEX M10	m10 x 1.5P	0.5-3.5	13	14.2	18.3	12.8

Thread Size	Pull- Out kN	Push-Out KN	Torque-To-Turn Nm	Maximum Torque
M5 x 0.8	5.8	2.8	7.4	7.8
M6 x 1.0	8.7	2.9	10.3	12.3
M8 x 1.25	9.9	3.7	22.1	31.4

Open End Steel Zinc Large Flange Hexagon

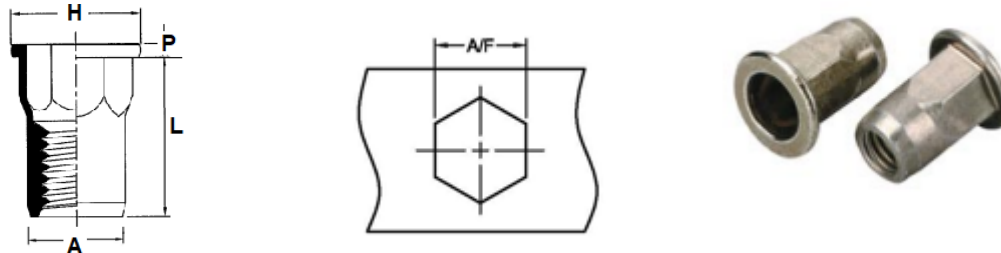

Past Code	Thread size	Grip Range	Hex hole A/F	Hex Size d2 +0.3 A	L	P	H
INSERTEX M4LF	M4 x 0.7	0.5-2.5	6	5.85	10	1	9
INSERTEX M5LF	M5 x 0.8	0.5-3	7	6.85	13.5	1	10.1
INSERTEX M6LF	M6 x 1.0	0.5-3.0	9	8.85	15.5	1.5	13.2
INSERTEX M8LF	M8 x 1.25	0.5-3.0	11	10.85	18	1.5	16.2
INSERTEX M10LF	M10 x 1.5P	1-3.5	13	12.85	21	2	19

Thread Size	Pull- Out kN	Push-Out KN	Torque- To-Turn Nm	Maximum Torque
M5 x 0.8	6.5	2.6	4.6	5.2
M6 x 1.0	15	5.6	8.8	12.2
M8 x 1.25	15.8	8.2	25.2	32

Value higher than stated due to bolt breakage, figure provided for guidance.

All figure are indicative and subject to change without notice. Testing should be carried out for each application

Note: Products in this catalogue are subject to availability