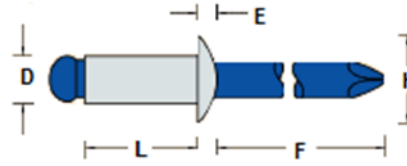


STAINLESS STEEL / STEEL OPEN TYPE RIVETS**Dome Head Rivets****BODY: Stainless Steel****MANDREL: Steel****Finish: Polished / Zinc Plated**

D Nom.	Part number	Grip Range	L(Max.)	H Nom.	E Max.	Hole Size	P Min.	Shear N	Tensile N
mm	mm	mm	mm						
	STS4-1	0.5-1.6	5.4						
	STS4-2	1.6-3.2	7						
	STS4-3	3.2-4.8	8.6						
	STS4-4	4.8-6.4	10.2						
3.2mm	STS4-5	6.4-7.9	11.7	6.4	1.02	3.3 - 3.4	27	1870N	2360N
	STS4-6	7.9-9.5	13.3						
	STS4-8	9.5-12.7	16.5						
	STS5-2	0.5-3.2	7.6						
	STS5-3	3.2-4.8	9.2						
	STS5-4	4.8-6.4	10.8						
	STS5-6	6.4-9.5	14						
4.0mm	STS5-8	9.5-12.7	17.1	7.9	1.27	4.1 - 4.2	27	2900N	3650N
	STS5-10	12.7-15.9	20.3						
	STS5-12	15.9-19.1	23.5						
	STS5-14	19.1-22.2	26.7						
	STS6-2	0.5-3.2	8.3						
	STS6-3	3.2-4.8	9.8						
	STS6-4	4.8-6.4	11.4						
	STS6-6	6.4-9.5	14.6						
	STS6-8	9.5-12.7	17.8						
	STS6-10	12.7-15.9	21						
4.8mm	STS6-12	15.9-19.1	24.1	9.5	1.52	4.9 - 5.0	27	4230N	5340N
	STS6-14	19.1-22.2	27.3						
	STS6-16	22.2-25.4	30.5						
	STS6-18	25.4-28.6	33.7						
	STS6-20	28.6-31.8	36.8						
	STS6-22	31.8-34.9	40						
	STS8-2	0.5-3.2	9.5						
	STS8-4	3.2-6.4	12.7						
	STS8-6	6.4-9.5	15.9						
	STS8-8	9.5-12.7	19.1						
	STS8-10	12.7-15.9	22.2						
6.4mm	STS8-12	15.9-19.1	25.4	12.7	2.03	6.5 - 6.6	32	7570N	9350N
	STS8-14	19.1-22.2	28.6						
	STS8-16	22.2-25.4	31.8						
	STS8-18	25.4-28.6	34.9						
	STS8-20	28.6-31.8	38.1						

Note: Products in this catalogue are subject to availability

Head Office: Concept Fasteners VIC
 9 Flight Drive, Tullamarine 3043, Victoria
 Tel: (03) 9338 6633 Fax: (03) 9338 6433
 : sales@conceptfasteners.com.au

Head Office: Concept Fasteners NSW
 5 Liverpool St, Ingleburn 2565, NSW
 Tel: (02) 9774 4416
 : salesnsw@conceptfasteners.com.au

Head Office: Concept Fasteners QLD
 Brisbane Branch Coming Soon!
 : qldsales@conceptfasteners.com.au


STAINLESS STEEL / STEEL OPEN TYPE RIVETS

Countersunk Head Rivets

BODY: Stainless Steel

MANDREL: Steel

Finish: Polished / Zinc Plated

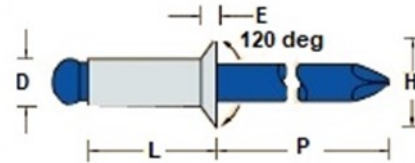

D Nom.	Part Number	Grip Range	L(Max.)	H Nom.	E Ref.	Hole Size	P Min.	Shear N	Tensile N
mm		mm							
	STSC4-2	2.3-3.2	7						
	STSC4-3	3.2-4.8	8.6						
	STSC4-4	4.8-6.4	10.2						
3.2mm	STSC4-5	6.4-7.9	11.7	5.6	0.79	3.3 - 3.4	27	1870N	2360N
	STSC4-6	7.9-9.5	13.3						
	STSC4-8	9.5-12.7	16.5						
	STSC5-3	3.0-4.8	9.2						
	STSC5-4	4.8-6.4	10.8						
4.0mm	STSC5-6	6.4-9.5	14	7.1	1.02	4.1 - 4.2	27	2900N	3650N
	STSC5-8	9.5-12.7	17.1						
	STSC6-3	3.8-4.8	9.8						
	STSC6-4	4.8-6.4	11.4						
4.8mm	STSC6-6	6.4-9.5	14.6	8.8	1.27	4.9-5.0	27	4230N	5340N
	STSC6-8	9.5-12.7	17.8						

Note: Products in this catalogue are subject to availability